


Trueconnect™ 3-WAY LOW POWER SPLITTER



MODEL - 3WPSWB/43

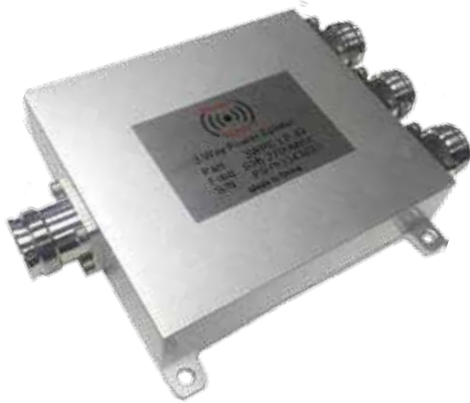

Low PIM 3-Way Power Splitter
[600-6000 MHz]

FEATURES

Wilkinson design Wide Band power splitter that offers optimal performance and low PIM specifications.

Specifications

Frequency Range (MHz)	600-6000
PIM, 3rd Order (dBc)	-153
PIM Test Method	2 X +43 dBm carriers
Power Rating, Combining (W)	1
Power Rating, Splitting (W)	50
Peak Power (kW)	1
Impedance (Ω)	50
Insertion Loss (dB)	2.3
Isolation @ Frequency (dB)	
	698-800 16
	800-2500 16
	2500-2700 16
VSWR	≤1.50:1
Split Loss (dB)	4.8
Connector	4.3-10 Female
Application	Indoor/Outdoor
Ingress Test Method	IEC 60529:2001 IP65
Operating temperature - °F (°C)	-13 to 185 (-25 to 85)
Relative Humidity	up to 100%
Dimensions in. (mm)	7.87 X 1.97 X 1.14 (200 X 92 X 29)
Weight lbs (kg)	1.23 (.56)

www.wirelessupply.com

© 2019 All rights reserved. Proprietary information. Wireless Supply reserves the right to modify or amend specifications without prior notice