

# True connect 20 WATT ATTENUATOR




MODEL # AT30/20/41MF



## FEATURES

Designed for indoor applications where low PIM is important. The cable based design is optimized for 2500-2700 MHz, however it offers excellent low PIM performance in other bands.

Specifications			
Optimized Frequency Range (MHz)	2500-2700		
Impedance	50Ω		
VSWR/Return Loss	≤1.15:1		
PIM, 3 <sup>rd</sup> order, 2 X 20W (dBc)	≤-153		
Max Power Average (W)	<20		
Operating Temperature (indoor)	-20 to 70 °C		
Connectors	41./9.5 Mini DIN		
Attenuation @ Frequency (dB)			Tolerance
698 MHz	15.1		± 1.0
850 MHz	16.7		± 1.0
1900 MHz	25.5		± 1.5
2500 MHz	29.4		± 1.5
2700 MHz	30..6		± 1.5
Dimensions in (mm)	Φ6.91 X 1.42 (176.8 X 36)		

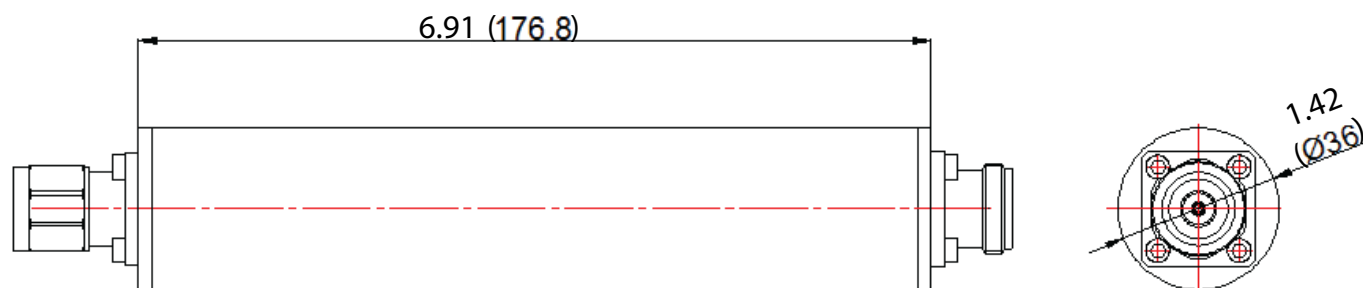

[www.wirelessupply.com](http://www.wirelessupply.com)

© 2019 All rights reserved. Proprietary information. Wireless Supply reserves the right to modify or amend specifications without prior notice