

True connect VHF /UHF/700/800 combiner




MODEL # FLTR-VU78/N

FEATURES

Multiband combiner that offers great performance in a small, compact design. Can be used for indoor or outdoor applications.



Specifications		Port 1	Port 2	Port 3
Frequency Range (MHz)		136-174	450-512	760-870
Insertion Loss (dB)		≤0.8		
Return Loss (dB)		≥18		
Rejection (dB)				
	Port 1	≥40 (UHF) ≥45 (700/800)		
	Port 2	≥40 (VHF) ≥40 (700/800)		
	Port 3	≥40 (VHF) ≥40 (UHF)		
Connectors		N Female		
Power Average (W)		50 per port		
Impedance (Ω)		50		
Operating Temperature °F (°C)		-22 to 140 (-30 to 60)		
Operational Humidity		0-95%		
Environmental Class		IP67 (Indoor or outdoor)		
Lightning Protection		8/20 μs 20 kA, 10/350 μspulse, 3KA		
Dimensions (in.)(mm)		5.64 X 3.35 X 1.26 (143.5 X 85 X 32)		
Weight- lbs (kgs)		1.1 (0.5)		
Mounting		Pole or Wall Mount		

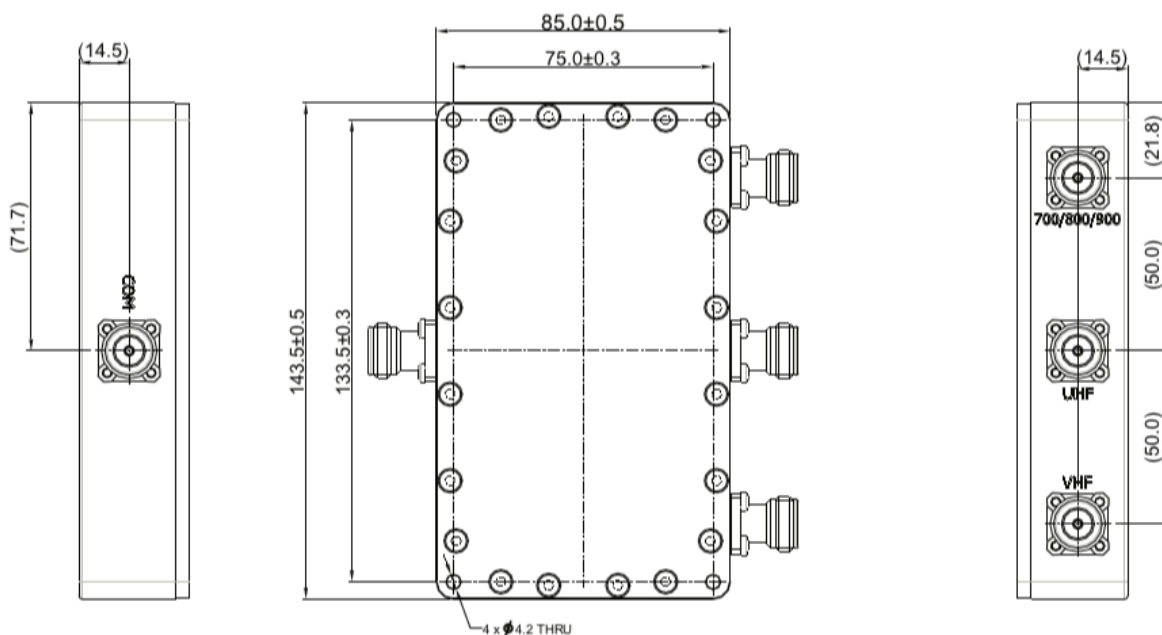

www.wirelessupply.com

© 2019 All rights reserved. Proprietary information. Wireless Supply reserves the right to modify or amend specifications without prior notice