

# True connect VARIABLE ATTENUATOR



MODEL # VAT30/NF

## FEATURES


Designed for installations where variable attenuation levels are required for balancing RF signals.



## Specifications

Frequency Range (MHz)	DC-2700
Attenuation Range	0-30 dB in 1 dB steps
VSWR	≤1.25:1
Insertion Loss (dB)	<1.0
Impedance (Ω)	50
Power Rating (W)	2
Peak Power (W)	100 *
Connector	N-Female
Dimensions (in)	Φ 1.50 X 4.72
Operating temperature - °F	-67 ~ 185

\* Pulse width 5 microseconds, duty ratio is 1%

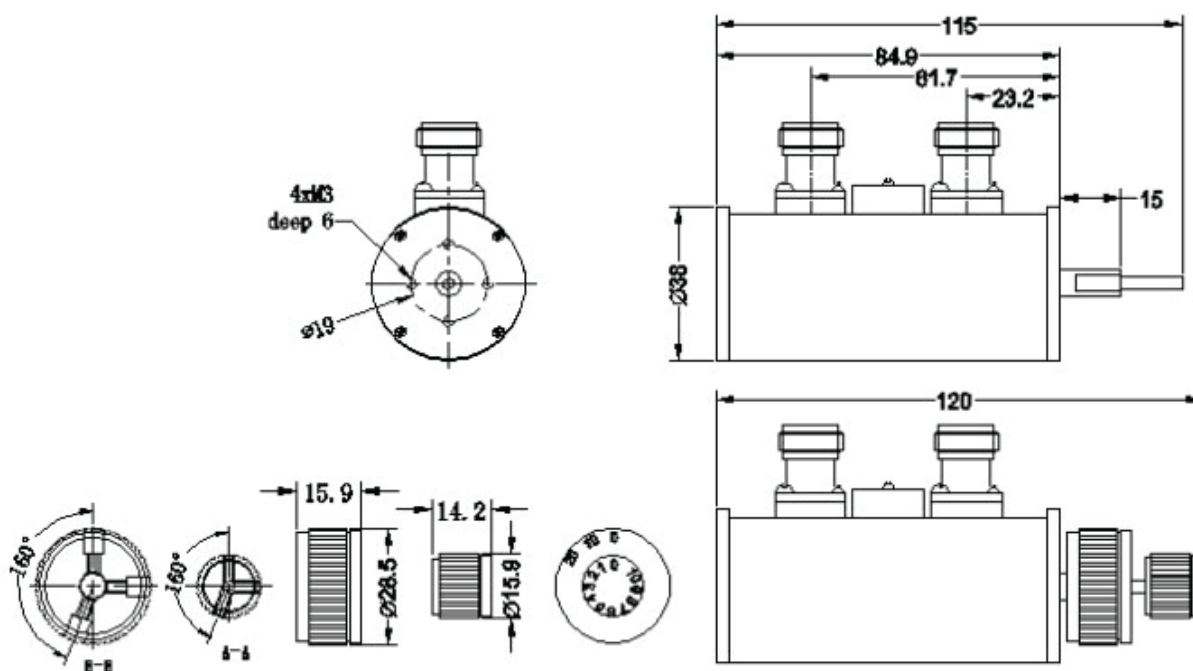

[www.wirelessupply.com](http://www.wirelessupply.com)

© 2019 All rights reserved. Proprietary information. Wireless Supply reserves the right to modify or amend specifications without prior notice