

# Trueconnect™ HIGH POWER SPLITTERS



## MODEL - XPS/43



### Power Splitters [340-960/1710-2700 MHz]

#### FEATURES




- Used in DAS systems for signal splitting
- Low PIM
- Low insertion loss
- High power rating
- Has 4.3/10 female connectors

#### Specifications

Frequency Range (MHz)	340-2700			
Power Rating, Combining (W)	30			
Power Rating, Splitting (W)	300			
Peak Power (kW)	3			
Impedance (Ω)	50			
Intermodulation (PIM) 2 X 43 dBm	≤-162 dBc			
	Split	2	3	4
Insertion Loss (dB)		0.3	0.4	0.5
Split Loss (dB)		3	4.8	6
VSWR		1.2	1.2	1.3
Weight - lbs (kg)		.64 (.29)	.89 (.38)	.93 (.42)
Operating temperature - °F (°C)	-31 to +185 (-35 to +85)			
Environmental	IP65 Indoor/Outdoor			

#### ADDITIONAL INFORMATION:

Mounting bracket included.

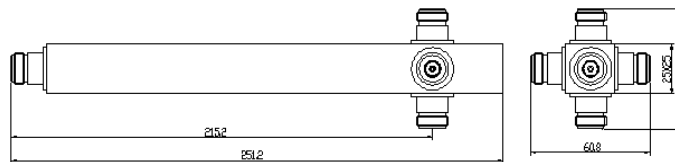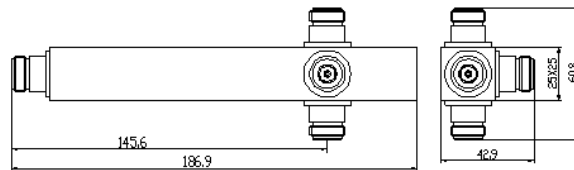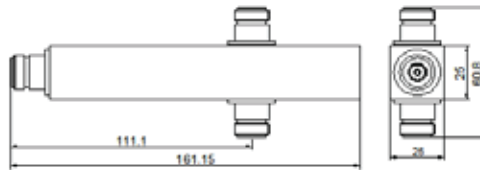

\*Drawing is for reference only

[www.wirelessupply.com](http://www.wirelessupply.com)

© 2019 All rights reserved. Proprietary information. Wireless Supply reserves the right to modify or amend specifications without prior notice