

# Trueconnect™ HIGH POWER SPLITTERS



## MODEL - XPSWB/43





### Power Splitters [600-6,000 MHz]

#### FEATURES

- Used in DAS systems for signal splitting
- Low PIM
- Low insertion loss
- High power rating
- Has 4.3/10 female connectors

#### Specifications

Frequency Range (MHz)	600-6000			
Power Rating, Combining (W)	20			
Power Rating, Splitting (W)	200			
Peak Power (kW)	3			
Impedance (Ω)	50			
Intermodulation (PIM) 2 X 43 dBm	≤-161 dBc			
	Split	2	3	4
Insertion Loss (dB)		0.4	0.6	0.6
Split Loss (dB)		3	4.8	6
VSWR		1.3	1.3	1.3
Weight - lbs (kg)		.64 (.29)	.89 (.38)	.93 (.42)
Operating temperature - °F (°C)	-31 to +185 (-35 to +85)			
Environmental	IP65 Indoor/Outdoor			

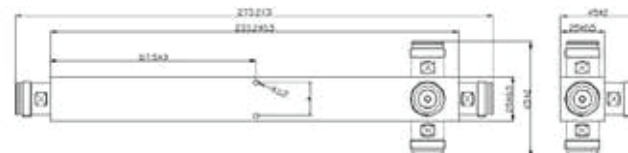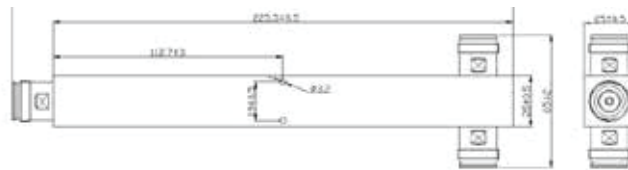

#### ADDITIONAL INFORMATION:

Mounting bracket included.

\*Drawing is for reference only

[www.wirelessupply.com](http://www.wirelessupply.com)

© 2019 All rights reserved. Proprietary information. Wireless Supply reserves the right to modify or amend specifications without prior notice

Drawing is for reference only