

True connect Ultra Flat omni




MODEL # IOF/43



FEATURES

Indoor Omni-directional antenna used for in-building applications to provide superior coverage in low signal areas when installing DAS systems.

- Ultra thin .20" thick
- Low PIM
- Small size offering excellent performance




Electrical Specifications				
Frequency Range (MHz)	698-806	806-960	1710-2170	2300-2700
Polarization	Vertical			
Gain (dBi)	2	2	4	4
Horizontal Beam Width (°)	360			
Intermodulation dBc (2x43 dBm carrier)	≤-153			
Impedance (Ω)	50			
VSWR	≤1.5			
Maximum input power (W)	50			
Lightning protection	DC Ground			

Mechanical Specifications	
Connector	4.3/10 Female
Connector position	On 402-LF Pigtail
Size in (mm)	5.82 X 4.05 X .20 (148 X 103 X 5)
Antenna weight - lb (kg)	0.44 (0.2)
Reflector material	Al
Radome material	UV ABS
Radome color	White
Operating temperature - °F (°C)	-40~130 (-40~55)

ADDITIONAL INFORMATION:

Fasteners for mounting the antenna to the ceiling or wall are included

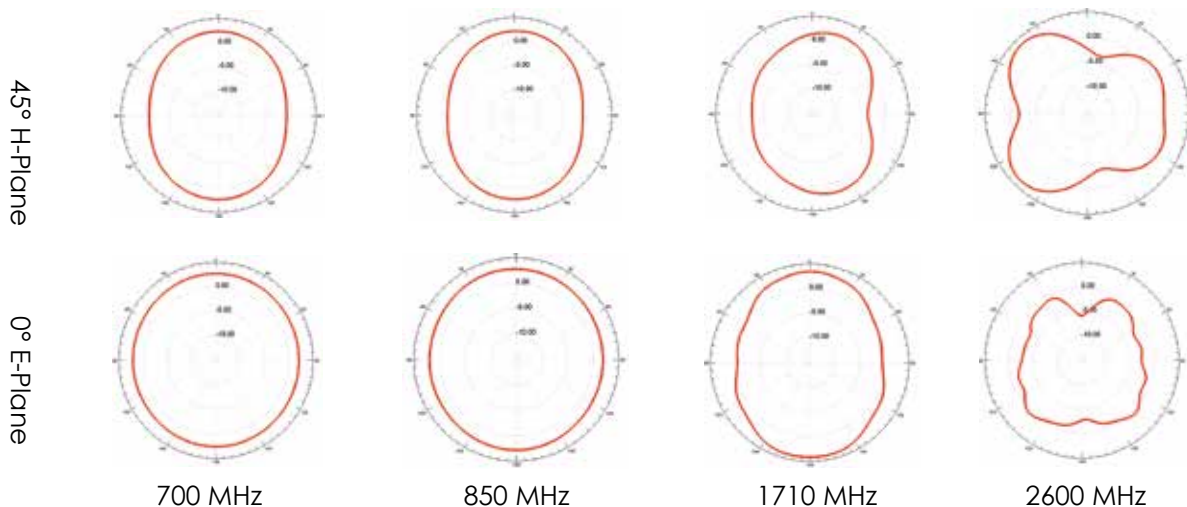

www.wirelessupply.com

© 2019 All rights reserved. Proprietary information. Wireless Supply reserves the right to modify or amend specifications without prior notice