

True connect VHF/UHF DIRECTIONAL COUPLER




MODEL # 10DCVU/N



FEATURES

- Typically used for in-building DAS systems to provide coverage solutions for public safety deployments
- Low VSWR
- High Isolation
- High Power

Specifications	
Frequency Range (MHz)	136-960
Connector	N Female
Coupling (dB)	10
Coupling Tolerance (dB)	± 1.2
Impedance	50 Ω
Insertion Loss (dB)	≤ 0.9
Isolation (dB)	≥ 25
VSWR	$\leq 1.25:1$
Max Power Input (W)	200
Peak Power (kW)	1.5
Dimensions in. (mm)	13.54 X 2.28 X .75 (344 X 58 X 19)
Operating Temperature °F (°C)	-25 to 167 (-30 to 75)
Weight (lbs)	1.3

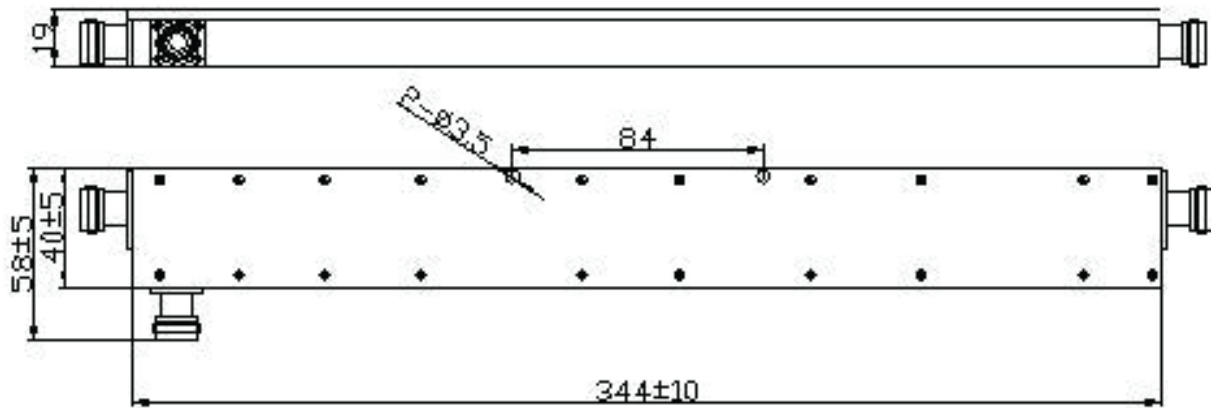

www.wirelessupply.com

© 2019 All rights reserved. Proprietary information. Wireless Supply reserves the right to modify or amend specifications without prior notice