

# True connect VHF/UHF DIRECTIONAL COUPLER




MODEL # 15DCVU/N



## FEATURES

- Typically used for in-building DAS systems to provide coverage solutions for public safety deployments
- Low VSWR
- High Isolation
- High Power

Specifications	
Frequency Range (MHz)	136-960
Connector	N Female
Coupling (dB)	15
Coupling Tolerance (dB)	$\pm 1.2$
Impedance	50 $\Omega$
Insertion Loss (dB)	$\leq 0.5$
Isolation (dB)	$\geq 30$
VSWR	$\leq 1.25:1$
Max Power Input (W)	200
Peak Power (kW)	1.5
Dimensions in. (mm)	13.54 X 2.28 X .75 (344 X 58 X 19)
Operating Temperature °F (°C)	-25 to 167 (-30 to 75)
Weight (lbs)	1.3

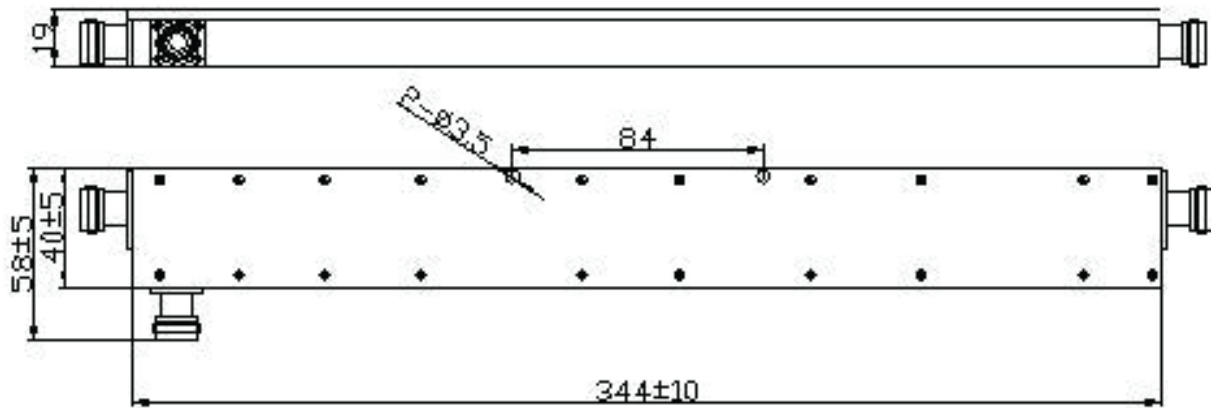

[www.wirelessupply.com](http://www.wirelessupply.com)

© 2019 All rights reserved. Proprietary information. Wireless Supply reserves the right to modify or amend specifications without prior notice