

True connect LOW PIM ATTENUATOR



MODEL # ATX/50/43/LP-6


FEATURES

Wide frequency range

Low VSWR

Used for in-building projects where low PIM is required

Specifications						
Frequency Range (MHz)	600-6000 Mhz					
Intermodulation (PIM) 2 X 43 dBm	≤ -160 dBc					
VSWR	≤ 1.35					
Power (W)	50					
Attenuation (dB)	3	6	10	15	20	30
Accuracy (dB)	± 1.4	± 1.4	± 1.5	± 1.6	± 1.7	± 1.8
Impedance	50 Ω					
Connector	4.3-10 female and 4.3-10 Male					
Operating temperature - °F (°C)	-22~150 (-30~65)					
Dimensions in. (mm)	7.87 X 7.87 X 1.65 (200 x 200 x 42)					
Weight lbs (kg)	3.75 (1.7)					

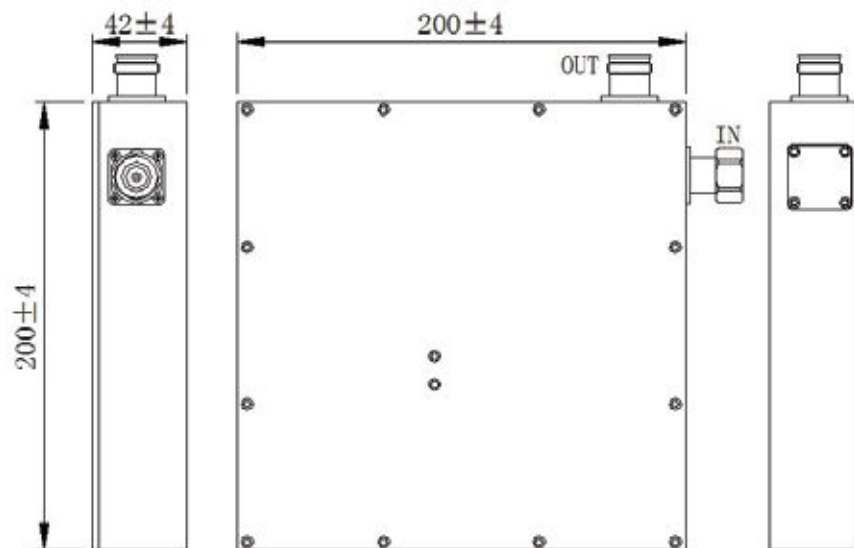

www.wirelessupply.com

© 2019 All rights reserved. Proprietary information. Wireless Supply reserves the right to modify or amend specifications without prior notice