

Trueconnect 5 X 2 HYBRID



MODEL - HC/5X2/RM/43



Low PIM Combiner

DESCRIPTION:

The 5 X 2 Hybrid allows for bidirectional installations to handle multiple carrier feeds to DAS systems.

Can be used as 5 input 2 output or 2 input with 5 outputs

Specifications	All Ports
Frequency Range (MHz)	698-2700
Insertion Loss (dB)	≤10
Isolation (dB)	≥23
VSWR	≤1.3:1
Impedance (Ω)	50
Power Rating (W)	≥50
Intermodulation dBc (2x43 dBm carrier)	≤-153
MTBF (hrs)	>100,000
Temperature Range F @	-4 to +140 (-20 to +60)
Environmental Humidity	0-99%
Dimensions in.(mm)	19 x 5.05 x 17.48 (482.86 x 128.5 x 444)
Weight	TBD
Connectors	4.3/10 Female
Installation	Indoor, 19" Rack





Trueconnect 5 X 2 HYBRID



MODEL - HC/5X2/RM/43

Low PIM Combiner

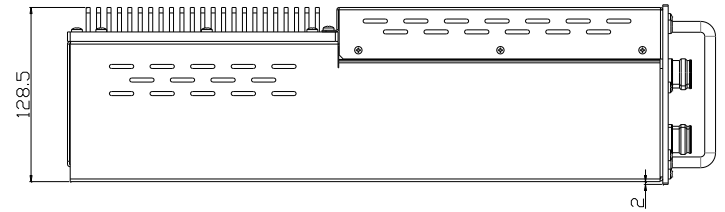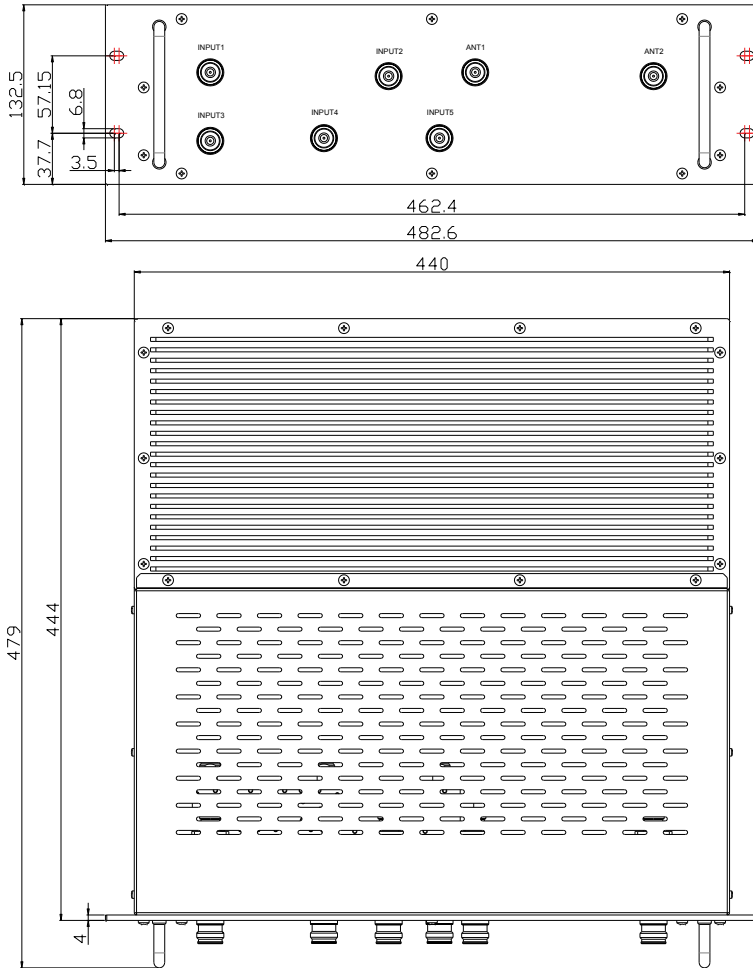

www.wirelessupply.com

© 2019 All rights reserved. Proprietary information. Wireless Supply reserves the right to modify or amend specifications without prior notice